

### Important Safety Notice:

Please follow these instructions to install the lock guards over the side-locks on your Ranger Stroller. These guards will prevent the side-lock from breaking upon take down and then failing to lock upon set-up. This will eliminate the possibility of your child's finger becoming caught in a broken lock.

This Kit covers the following model numbers:





46720




46721

### Parts Included:

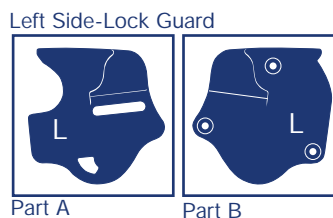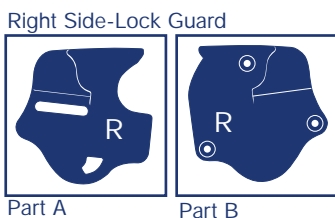

3 Screws



Please Note: Separate parts into right "R" and left "L". Orient right and left as if you are the child sitting in the stroller.

### Tools required:


Phillips head screwdriver

If your Kit does not contain one of the parts listed above, please contact Kolcraft Customer Service immediately at:

**1-800-453-7673 (1-910-944-9345 outside of the U.S.)**

## RIGHT SIDE OF STROLLER

FIG. 1

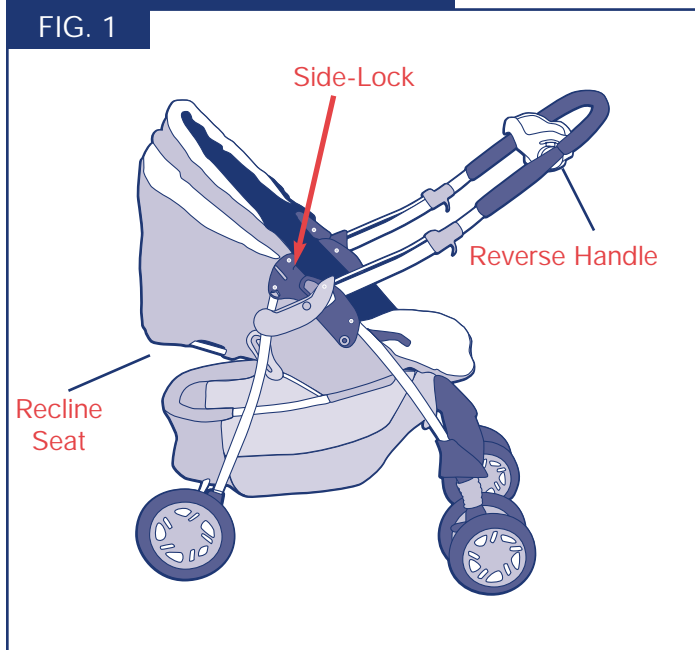

1. Reverse handle to carriage position. Recline Seat.

FIG. 2



2. Adjust reversible handle up one position as shown (45 degrees)

FIG. 3




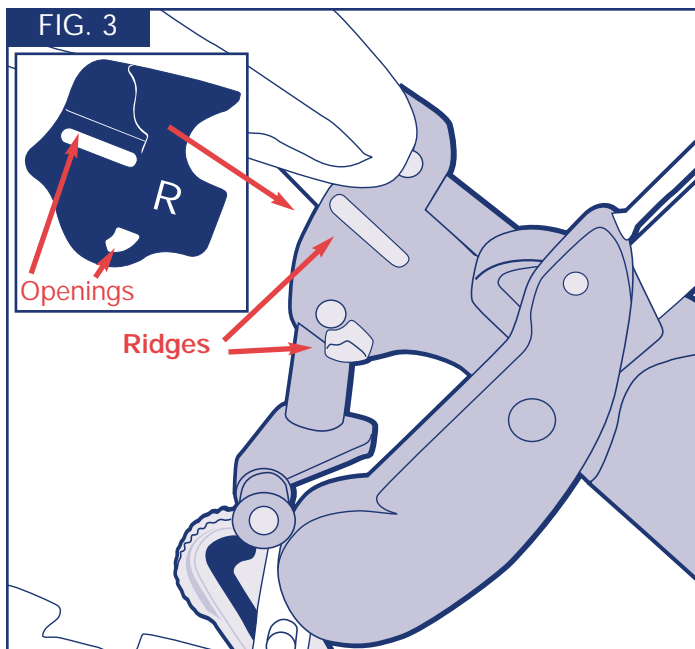




FIG. 4

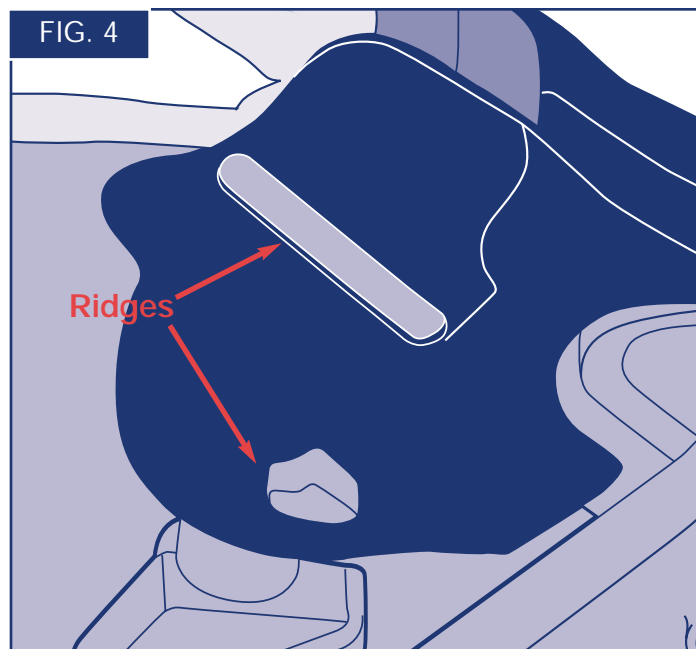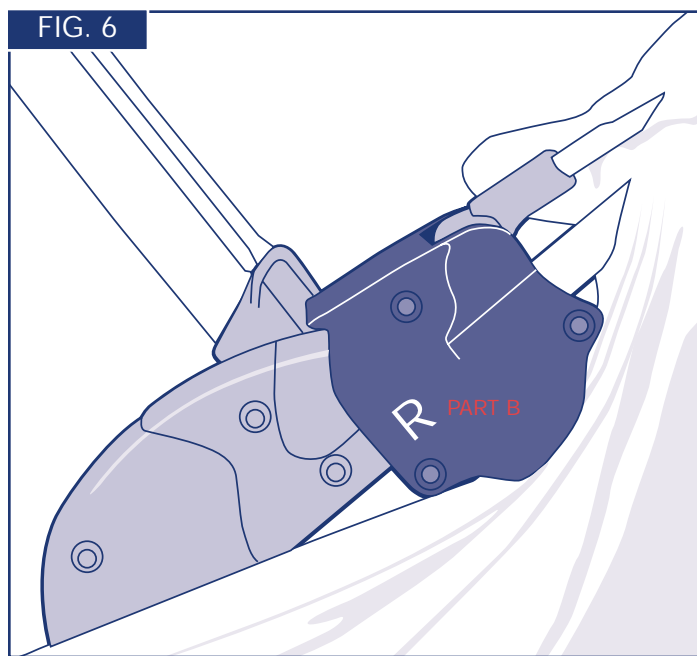

3. Take Right Side-Lock Guard. Place "Part A" above side-lock so that the openings in the part fit over the ridges on the mechanism (as shown). Make sure ridges fit as shown.

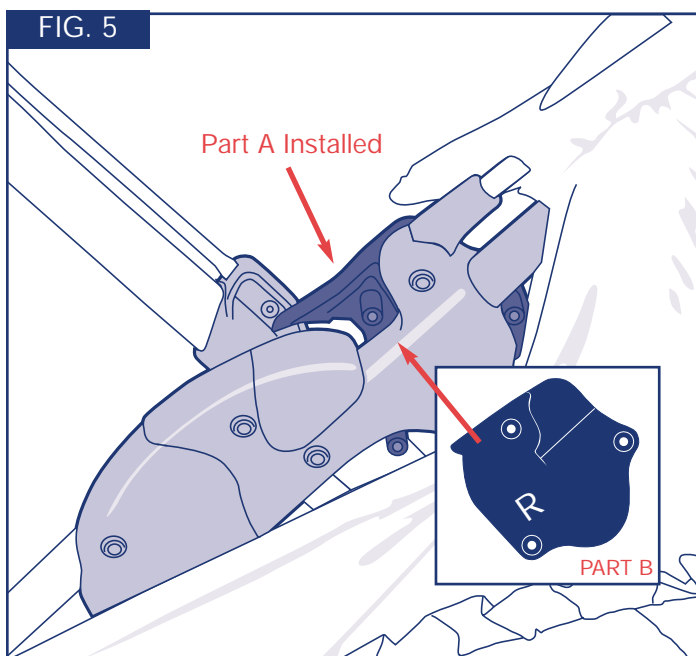

4. Pull back side of canopy in stroller seating area to show folding mechanism. Place "Part B" so that the screw holes match up with the holes in "Part A"

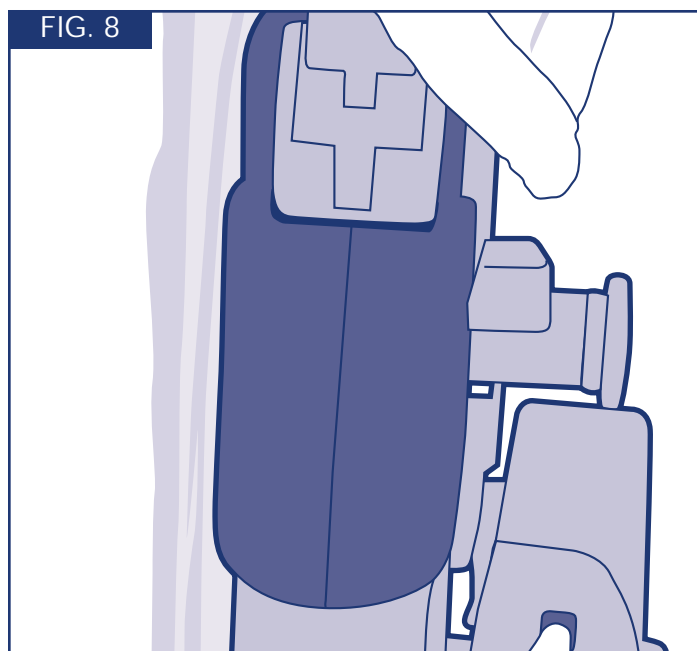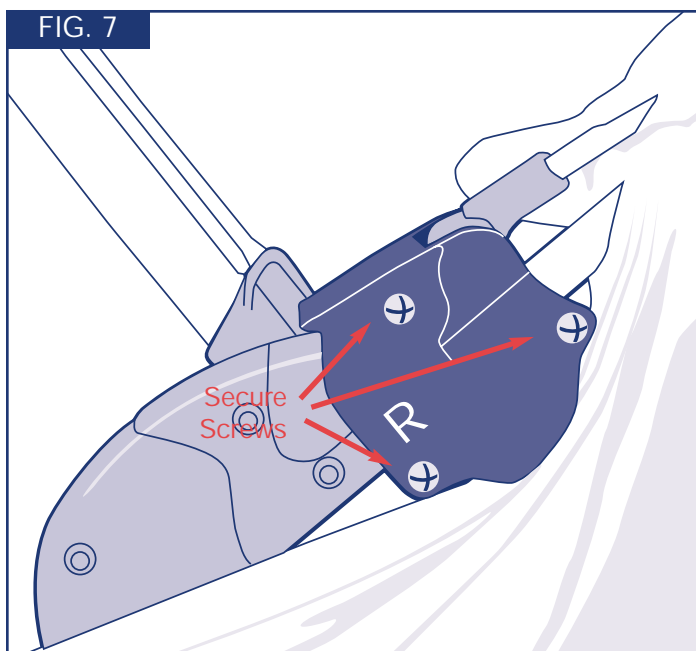

5. Using a Phillips head screwdriver, join "Part A & B" with 3 screws provided.
6. Make sure "Parts A & B" are tightly screwed, leaving no gap between them. If not, tighten screws or adjust any misalignment.

Repeat for the left side-lock guard.

**FINAL ASSEMBLY IS NOW COMPLETE**